COMPACT 10
COMPACT 12
COMPACT 14

SMART RUGGED DESIGN

> Impact-proof counterweight with integrated ladder protection, AC motors and charger plug

> Reinforced guardrails with additional vertical stile for maximum durability

MAXIMIZED POTENTIAL

> Access all worksites: foldable guardrails, lateral & longitudinal forklift pockets

> IN/OUT usage* with full height driving and no load restriction

UNIQUE USER EXPERIENCE

> Proportional movements for precise driving (AC motors)

> Ergonomic upper control box with grab handle & speed selector

UNBEATABLE SERVICEABILITY

> Haulotte Activ'Energy Management for battery care

> On-board & remote settings and diagnostic tools with Haulotte Diag, Haulotte Activ'Screen and Sherpal telematics solution

* COMPACT 14: indoor only

COMPACT 10
COMPACT 12
COMPACT 14

ELECTRIC SCISSOR LIFTS

TECHNICAL DATA

	COMPACT 10 AE	COMPACT 12 AE	COMPACT 14 AE
Working height	10 m	11.75 m	13.75 m
Platform height	8 m	9.75 m	11.75 m
Max. drive working height	8 m	9.75 m	11.75 m
Lift capacity - inside	450 kg (3 pers.)	320 kg (3 pers.)	
Lift capacity - outside	450 kg (1 pers.)	320 kg (1 pers.)	NA
Lift capacity on the extension	120 kg		
A Platform length	2.4 m		
B Platform length - extended	3.32 m		
Length - extension	0.92 m		
C Platform width - outside	1.17 m		
D Height - stowed	2.35 m	2.47 m	2.72 m
Height - guardrails lowered	1.65 m	1.77 m	2.02 m
E Overall width	1.20 m		
F Length	2.5 m		
G Wheelbase	1.86 m		
H Ground clearance - center	12.5 cm		
Ground clearance - deployed potholes	2 cm		
Drive speed	0.7 / 1.5 / 4.2 km/h		
Gradeability	25 %		
Tilt (longitudinal / lateral)	3.5° / 1.5°		
Turning radius - outside	1.83 m		
Non-marking tyres	15 x 5		
Batteries	24 V - 225 Ah (C20)		
Hydraulic system capacity	10 l	14 l	
Weight	2 490 kg	2 940 kg	3 070 kg

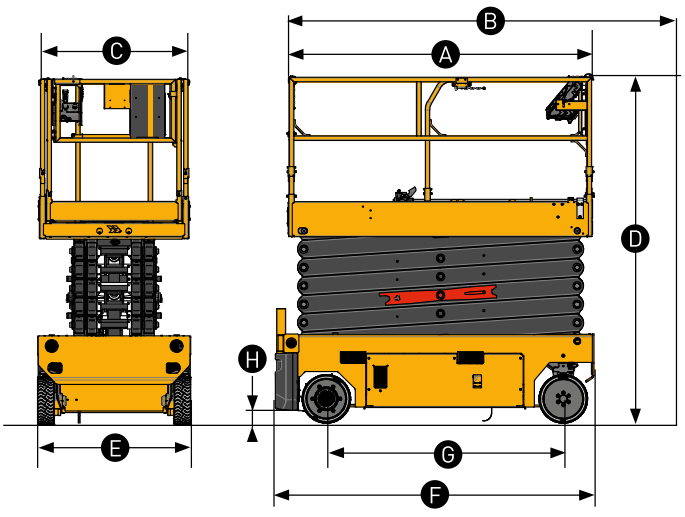

STANDARD EQUIPMENT

> Haulotte Activ'Energy Management: Smart CAN charger
> 27A multivoltage charger
> Battery access with swing out tray
> Battery level indicator
> Haulotte Activ'Screen (battery charge information, hourmeter, service alerts & failures in code or in text...)
> Lateral & longitudinal forklift pockets
> Foldable guardrails
> Front platform extension
> AC motors
> Mobile upper control box
> 2 drive speeds selector
> Manual emergency descent
> Mobile pothole guards
> MyHaulotte multi-services portal access
> 2 front steering wheels, 2 rear drive wheels
> Solid non marking tires
> Motion alarm
> Electric brake release system
> Drop bar entry

OPTIONS AND ACCESSORIES

> Haulotte Activ'Energy Management: automatic or manual battery water filling systems
> AGM maintenance-free batteries
> Secondary guarding system
> Telematics solutions
> Pipe cradle
> Panel carrier
> Swing gate entry
> Additional protection of upper & lower control box
> Basket plug (110 / 230 V)
> Working light
> Flashing light (single, dual or 360°)
> Biodegradable hydraulic oil
> Cold weather hydraulic oil

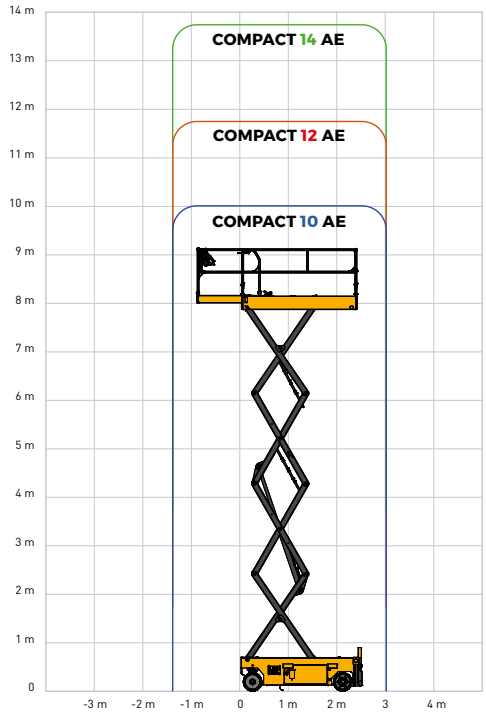

40012254440 - Non contractual document - We reserve the right to modify the technical characteristics of this document without notice - 04/2022

Rue Emile Zola - 42420 Lorette - France · Tel: +33 (0)4 77 29 24 24 · Fax: +33 (0)4 77 29 43 95 ·
haulotte@haulotte.com · **www.haulotte.com**

Haulotte
LET'S DARE TOGETHER